


# LOCKER

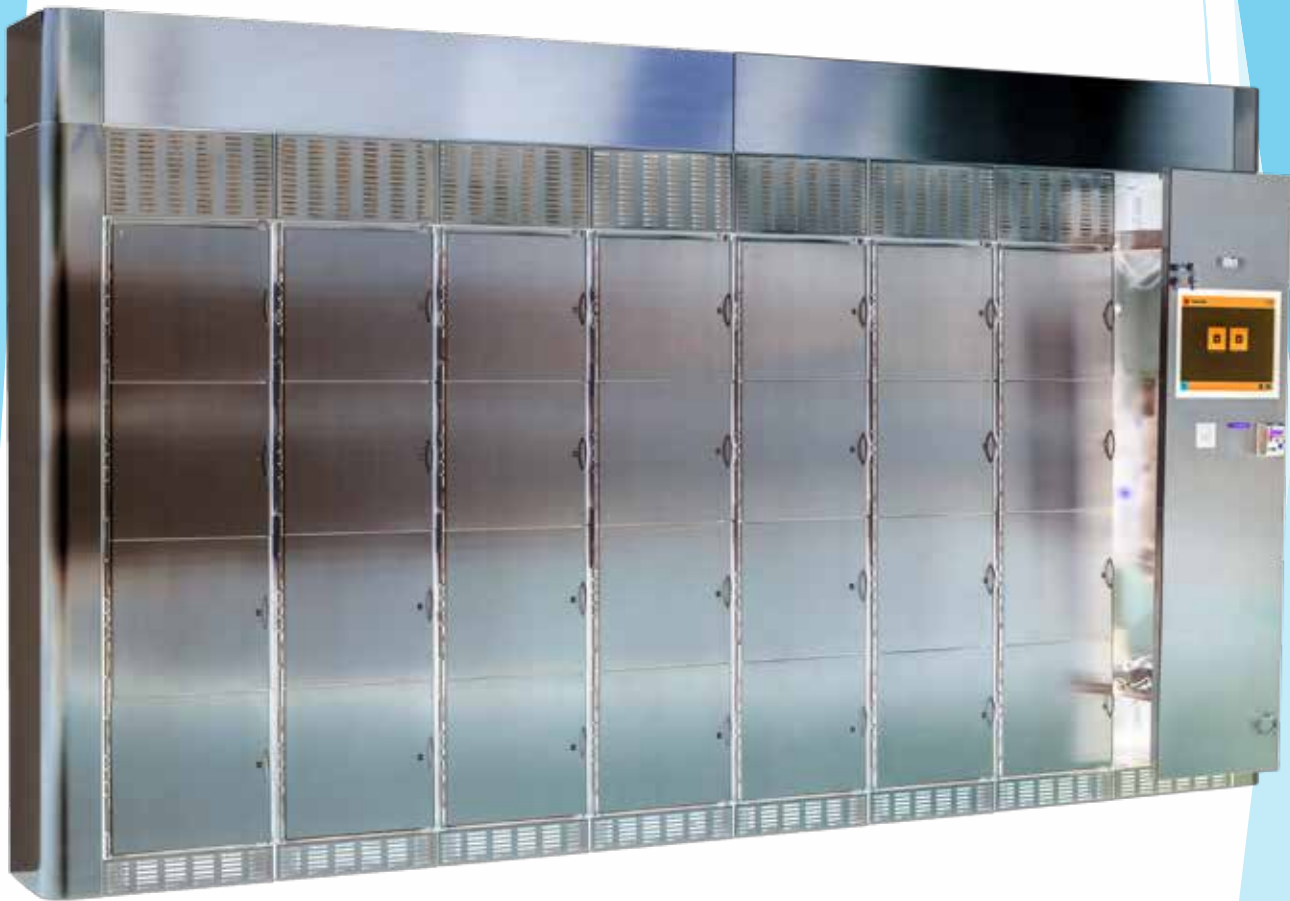


## VENDING MACHINE MODEL "LOCKER", REFRIGERATED

"LOCKER" IS A REFRIGERATED VENDING MACHINE ABLE TO DISPENSE FRESH PRODUCTS IN CRATES OR PACKAGES OF DIFFERENT SIZES.

CONSISTING OF A STURDY, **AISI 304** BRUSHED STAINLESS STEEL STRUCTURE AND INTERNAL INSULATION SUITABLE FOR A TEMPERATURE UP TO **3°C**.



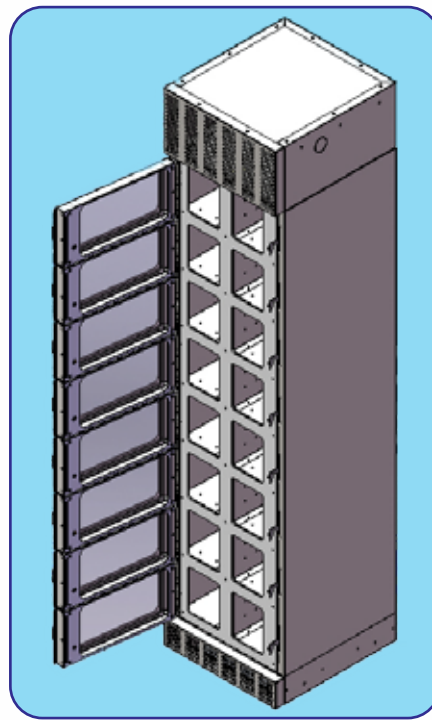

## MAIN FEATURES:

- MODULAR MACHINE (MAX. 10 MODULES) WITH A STURDY AISI 304 STAINLESS STEEL STRUCTURE CONSISTING OF MODULES PROVIDED WITH 4, 8 OR 16 COMPARTMENTS.
- THE MACHINE IS ALSO AVAILABLE IN NON-REFRIGERATED VERSION.
- DIMENSIONS OF EACH MODULE: MM 474 x 513 x 2052 (W x D x H)
- USEABLE DIMENSIONS OF COMPARTMENTS:
  - 4 COMPARTMENTS MM 353.5 x 427.5 x 385 (W x D x H)
  - 8 COMPARTMENTS MM 353.5 x 427.5 x 173 (W x D x H)
- DOOR OF COMPARTMENTS AVAILABLE IN 2 VERSIONS: ALL-STEEL OR STEEL+GLASS.
- THERMAL INSULATION:
  - A) FOR ALL-STEEL DOOR: IT CONSISTS OF A SPECIAL POLYISO EXPANDED FOAM.
  - B) FOR STEEL+GLASS DOOR: IT CONSISTS OF DOUBLE GLAZING AND INTERSPACE WITH ARGON, WITH TEMPERED FRONT GLASS AND ANTI-BREAKAGE REAR GLASS.
- CLOSING SYSTEM WITH RETRACTABLE HOOK FOR A PERFECT DOOR CLOSING AND CLOSING CONTROL SYSTEM.
- GENERAL ELECTRONIC BOARD WITH MDB COMMUNICATION INTERFACE FOR THE PAYMENT SYSTEMS AND/OR TOUCH SCREEN FOR USER INTERFACE.
- PERIPHERAL BOARD ON EACH MOTOR WITH INTERNAL TEMPERATURE MEASURING SYSTEM AND LIGHTING OF EVERY COMPARTMENT.
- AIR CHANNELING SYSTEM AND FLOW CONTROL.
- VENTILATION UNIT
- POWER SUPPLY: 230 V 50 Hz
- WEIGHT OF 1 MODULE: WITH 4 COMPTMS 150 KG - WITH 8 COMPTMS 200 KG (-15 KG WITHOUT REFRIGERATION)

PROJECT VENDING S.R.L.

Via Risorgimento 20 - 31047 Ponte di Piave (TV) - Tel. +39 0422 895107

www.projectvending.com - info@projectvending.it